

DEEneo-ISC | LVDT

Inline Signal Conditioner, integrated in sensor cable

- Digital signal processing by microcontroller
- Resolution 16 bit
- Linearisation of sensor signal
- Signal adjustment via SET button or software
- Cable break detection



INTRODUCTION


The **DEEneo-ISC inline signal conditioner** was developed for operating inductive LVDT sensors (full bridge) and is integrated into the sensor connection cable. The electronics supply the sensor and convert the sensor signal into a standardized, analogue output signal with the help of a microcontroller.

DEEneo-ISC is designed for the operation of eddylab LVDT displacement transducers with fixed cable output or 4-pin M12 connector output. Operation of all commercially available LVDT sensors is also possible. Please contact eddylab for the connection of sensors from other manufacturers at: sales@eddylab.de.

Functional principle: The primary coil of the connected sensor is excited with a sinusoidal signal. To determine the sensor position, the secondary coils are evaluated differentially and output as an analog signal. The internal, ratio-metric signal processing is digital and guarantees high resolution and immunity to external influences (EMC).

The frequency and amplitude can be set using the eddySetup configuration software for optimum performance of the measuring chain. A pushbutton (SET button) is used for basic configuration and for setting the measuring range limits - this enables quick and easy adaptation to the customer's application.


Please note: Where possible, eddylab calibrates the sensor and electronics as a measuring chain. The sensor characteristic curve can be linearized to meet the highest accuracy requirements.

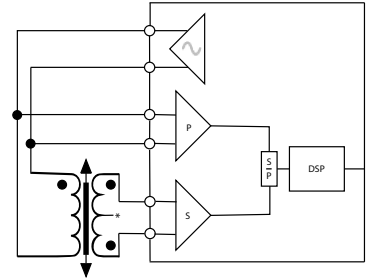

TECHNICAL DATA

| MODEL | DEEneo-ISC |
|----------------------------|---|
| Output signal | 0...20 mA, 4...20 mA (load < 300 Ohm) |
| | 0...5 V, ± 5 V; 0...10 V, ± 10 V |
| Output protection | signal output impedance 150 Ohm |
| Power supply | 9...36 VDC |
| Power consumption | 70 mA at 24 VDC, 130 mA at 12 VDC |
| Sensor supply | standard: 3V / 3.3 kHz, can be modified by software |
| Settings (factory setting) | frequency, amplitude, output signal |
| Resolution | 16 bit |
| Signal processing | digital via microcontroller |
| Signal adjustment | via SET-button or software |
| Filter corner frequency | digital adjustable, standard 300 Hz |
| Linearisation of sensor | yes, optionally possible |
| Isolation stability | > 500 VDC |
| Reverse protection | yes |
| Overvoltage protection | output: 16 V bipolar suppressor diode / permanent overvoltage up to 24 V input: Bipolar suppressor diode 36 V / Polyfuse 0.5 A on sensor side: 12 V |
| Cable break detection | yes |
| Operating temperature | -40...+85 °C |
| Storage temperature | -40...+85 °C |
| Protection class | IP40 |
| EMC | EN IEC 61326-1:2021 |
| Mounting | bore ø5,2 |

TECHNICAL DRAWING

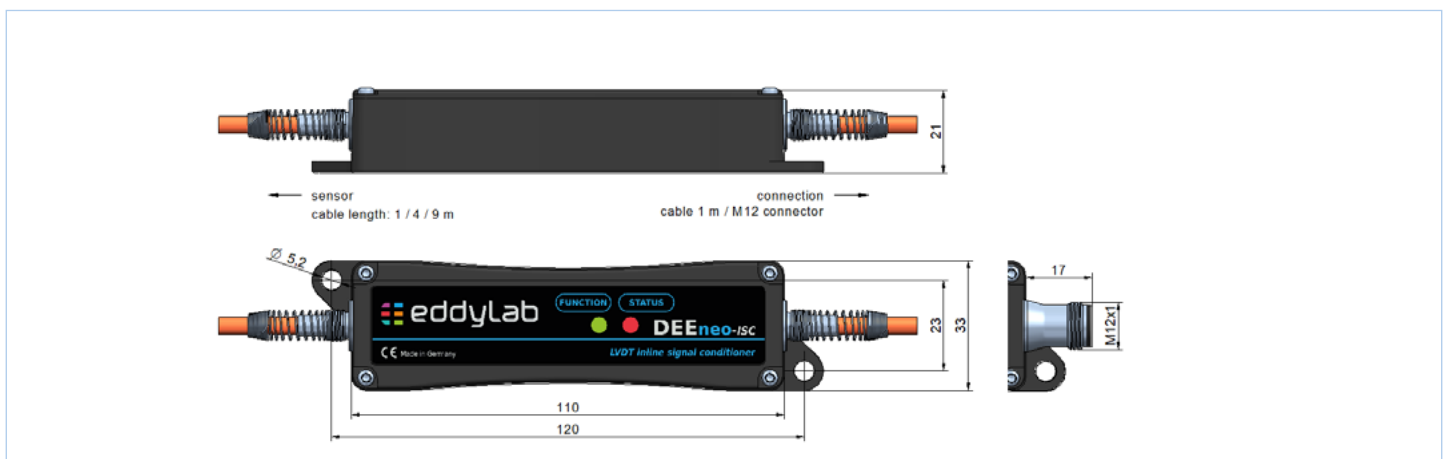


CONNECTION

DEEneo-ISC is designed for the operation of eddylab LVDT displacement transducers with fixed cable output or 4-pin M12 connector output. eddylab offers individual special solutions for sensor variants with 5-/6-pin connectors/cables. In this case, please contact eddylab at sales@eddylab.de.

DEEneo-ISC is integrated into the sensor connection cable. If the sensor has an M12 plug output, variants with M12 connection cables are available. The mating M12 cable socket is located on the sensor side. A cable with open strands or an M12 connector is available for the connection side. Please see illustrations on page 4 for clarification.

| FUNCTION | WIRE COLOUR OF EDDYLAB CABLES | | M12 CONNECTOR |
|-------------|-------------------------------|---------------|---------------|
| | TPE CABLE | PTFE-UL CABLE | PIN |
| Primary + | white | white | 2 |
| Primary - | brown | yellow | 1 |
| Secondary 1 | blue | brown | 3 |
| Secondary 2 | black | green | 4 |



CABLE BREAK DETECTION

The DEEneo-ISC electronics have integrated cable break detection based on an impedance measurement of the LVDT's primary coil. If the sensor cable is cut, the impedance at the electronics changes independently of the core position and the cable break detection is triggered. This requires the connections of the primary coil of the sensor to be cut. A partial break only of the connections to the secondary coils does not activate this function.

REGULAR OPERATION



- "STATUS LED" lights up green.

CABLE BREAK



- „STATUS LED“ flashes red in case of an error.

| CONDITION | STATUS LED |
|-------------|------------|
| normal | green |
| cable break | red |

SOFTWARE EDDYSETUP

The **eddySetup** configuration tool is available at www.eddylab.com. The basic settings for operating the DEEneo can be made using the SET button. Alternatively, these and other functions can be configured using the **eddySetup** software.



Functions:

- Sensor supply: frequency, amplitude
- Output signal selection
- Filter corner frequency
- Teach function
- Restore factory settings

System requirements:

- Windows 10
- Windows 11

ORDER CODE

DEEneo-ISC - **X** - **X**
a **b**

type

DEEneo-ISC = Inline Signal Conditioner

a output signal

| | | |
|------|---|------------|
| 020A | = | 0...20 mA |
| 420A | = | 4...20 mA |
| 10V | = | 0...10 V |
| 5V | = | 0...5 V |
| ±5V | = | -5...5 V |
| ±10V | = | -10...10 V |

b type of cable / cable length

E1: for sensor with cable output

- = integrated in sensor cable

E2: for sensor with connector output

| | | |
|---|---|---|
| A | = | cable 2 m, M12 straight female connector |
| B | = | cable 2 m, M12 angular female connector |
| C | = | cable 5 m, M12 straight female connector |
| D | = | cable 5 m, M12 angular female connector |
| E | = | cable 10 m, M12 straight female connector |
| F | = | cable 10 m, M12 angular female connector |

b type of cable / cable length

E3: for sensor with cable output

- = integrated in sensor cable, M12 connector

E4: for sensor with connector output

| | | |
|------|---|--|
| M12A | = | cable 2 m, M12 straight female conn., M12 conn. |
| M12B | = | cable 2 m, M12 angular female conn., M12 conn. |
| M12C | = | cable 5 m, M12 straight female conn., M12 conn. |
| M12D | = | cable 5 m, M12 angular female conn., M12 conn. |
| M12E | = | cable 10 m, M12 straight female conn., M12 conn. |
| M12F | = | cable 10 m, M12 angular female conn., M12 conn. |

POSSIBLE COMBINATIONS

- Variation S3+E: sensor with cable output, DEEneo-ISC integrated in sensor cable
- Variation S3+E3: sensor with cable output, DEEneo-ISC integrated in sensor cable, M12 connector output side
- Variation S1+E2: sensor with connector output, cable electronics DEEneo-ISC with cable K4PxM
- Variation S1+E4: sensor with connector output, cable electronics DEEneo-ISC with cable K4PxM, M12 connector output side

