



- Piezoresistive measurement principle
- Ceramic membrane
- Long-term stable operation
- EMC and Reverse Polarity protection
- 4-20 mA or 0-10 V analog output
- Different level measuring between 4 meters and 100 meters
- IP68 protection class
- High quality
- Reasonable price, economical solution

PTL 120 level pressure sensors with piezoresistive working principle; are used for level measurement in applications like waste waters, grey waters, reservoirs, sea and salt waters etc. With its ceramic membrane structure, it has high corrosion resistance and is highly resistant to salt water.

With its stainless steel housing with IP68 protection class, it can work in harsh environments.

Thanks to the surge voltage and reverse polarity protection, the PTL 120 series are unaffected by electrical fluctuations and reverse connections.

Optionally configurable pressure ranges, analog output and mechanical connection options offer solutions suitable for various applications.



TECHNICAL SPECIFICATIONS

Measuring Range	Different models between 400 mbar and 25 bar can be selected		Electrical Connection	3 x 0,22 mm ² shielded cable Cable outer diameter: 7,5 ±0,2 mm Drain pipe diameter: 2 mm (Cable length according to level value)
Measuring Principle	Piezoresistive		Operating	-20°C ... +70°C
Membrane	Ceramic		Storage Temperature	-20°C ... +70°C
O-Ring	NBR		Protection Class	IP68
Maximum Pressure	%200 FS		Material	Housing: 1.4462 (duplex), 1.4404 (AISI 316L), Titanium Cable: PE (polythene)
Accuracy	%0,3		Weight	~350 gr
Electrical Interface	Output Signal	Supply Voltage	EMC Protection	Emission: EN/IEC 61000-6-3 Immunity: EN/IEC 61000-6-2
	0...10 VDC (3 wire)	12...30 VDC		
	4...20 mA (2 wire)	8...32 VDC		

ELECTRICAL CONNECTION



4-20 mA Connection

Signal	Cable
+8...32 VDC (+ supply)	Red
4-20 mA	Black

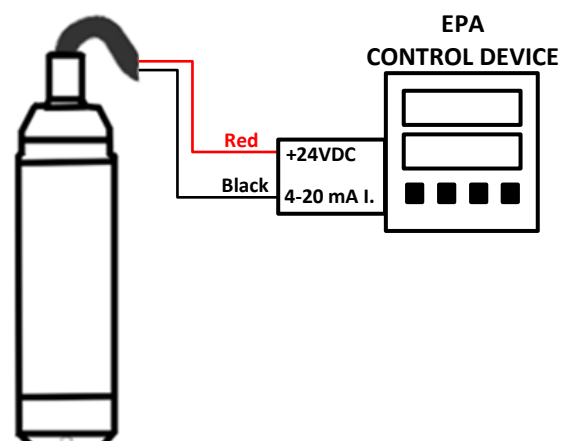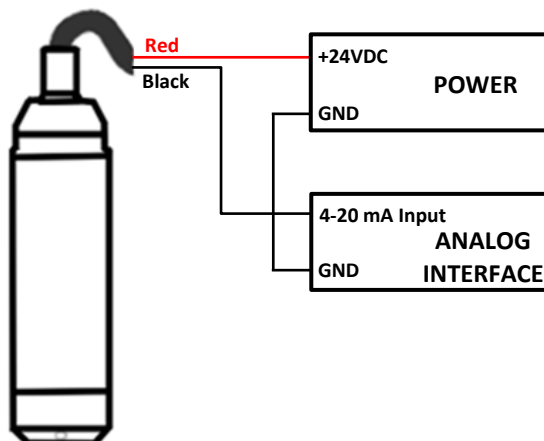


0-10 VDC Connection

Signal	Cable
+12...30 VDC (+ supply)	Red
GND	Black
0-10 VDC	Yellow

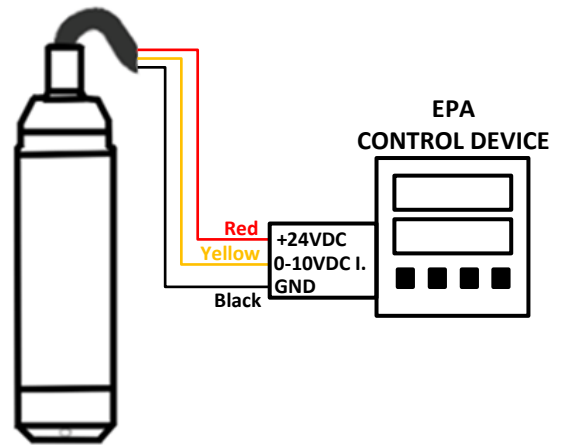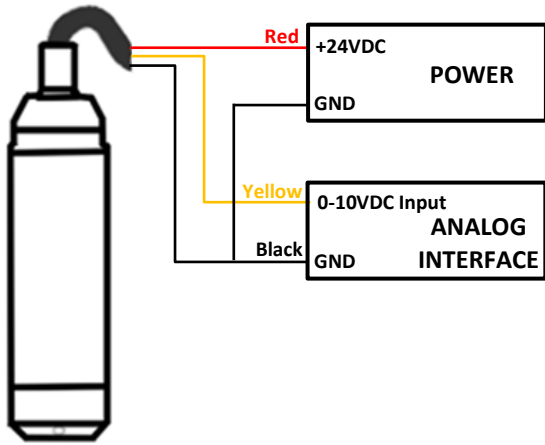



WARNING!!!

If the wick in the drain pipe is removed, the product will be out of warranty.

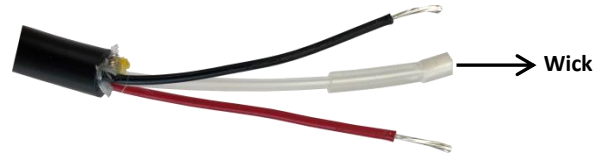


SAMPLE APPLICATION


During the application, the product free submerge. Dams, rivers and streams of the product against a surge in applications should be suspended through the pipes.

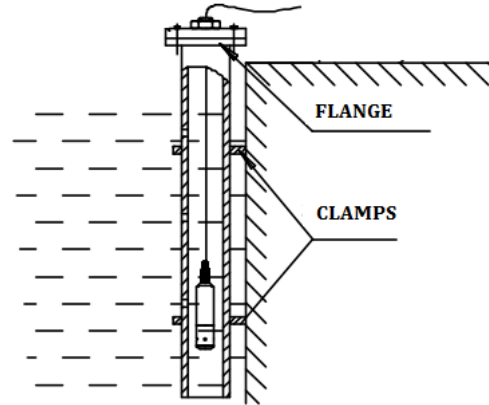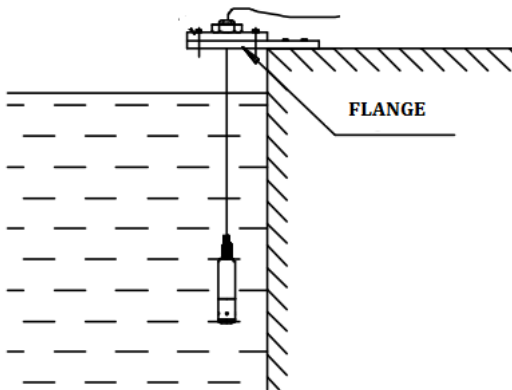

MECHANICAL DIMENSIONS (with standard cap) (in mm)

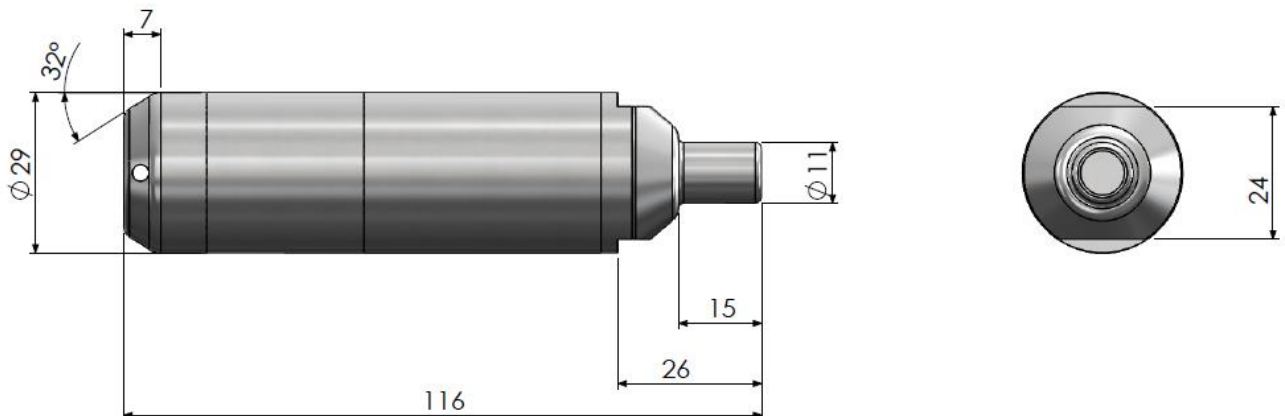


MECHANICAL CONNECTION OPTIONS

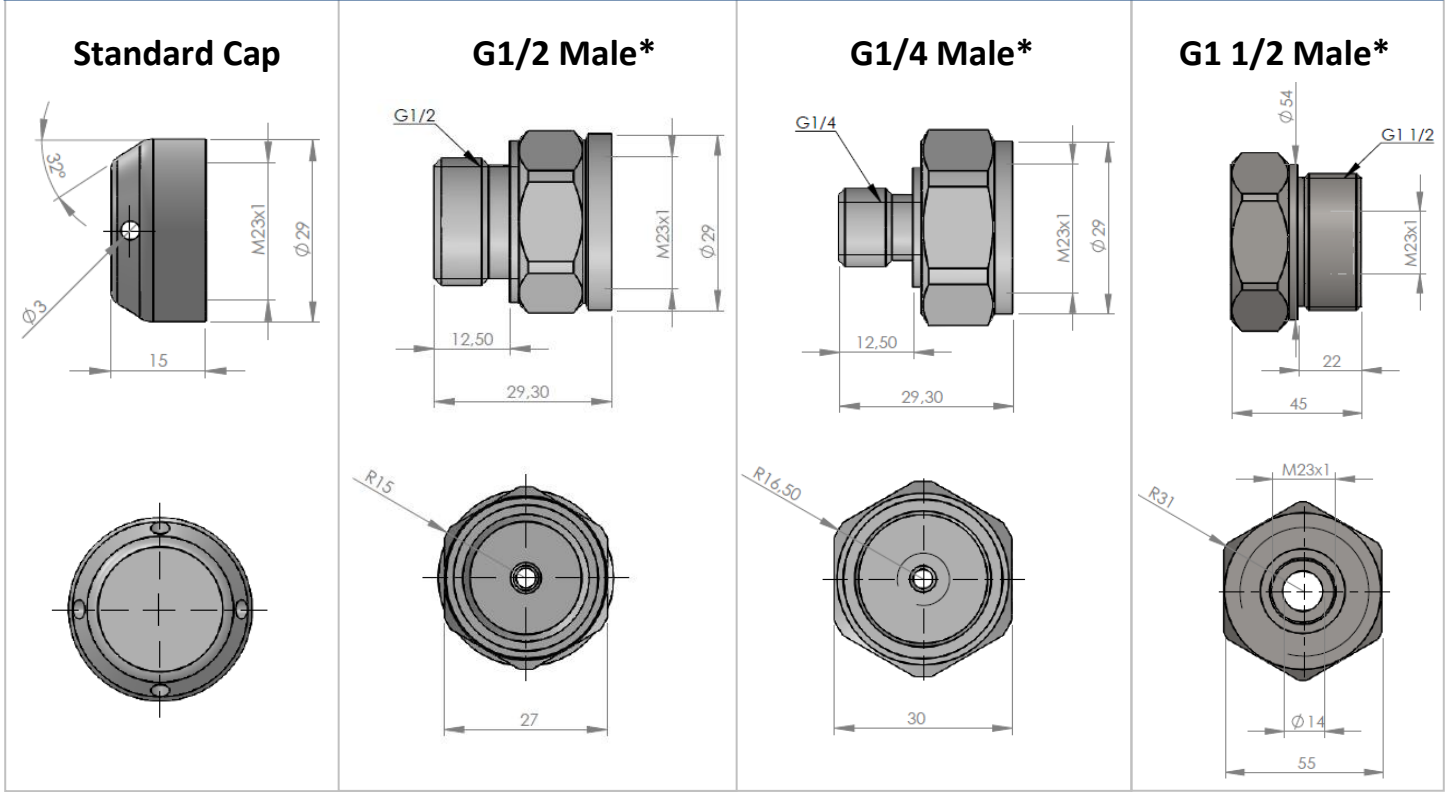

Fittings marked with (*) are optional.

SAMPLE APPLICATION FIELDS

- Seawater, saline water applications
- Grey water, waste water
- Wells
- Water Tanks
- River Level
- Lake Level
- Reservoirs

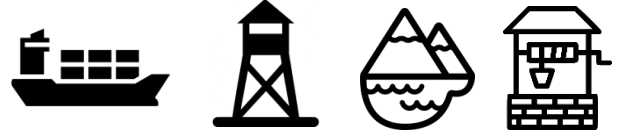

ORDER CODE

Model	Pressure	Output Signal	Mechanical Connection	Cable Length	Body Material
PTL 120	XX	X	XX	XX	XX
<p>Pressure Different models between 400 mbar and 25 bar can be selected *(For water, 1 meter level = 100 milibar)</p> <p>Output Signal V : 0-10 VDC A : 4-20 mA</p> <p>Mechanical Connection No Code : Standard Cap G1/4 : G1/4 Connection G1/2 : G1/2 Connection G1.1/2 : G1 1/2 Connection</p> <p>Cable Length 5M : 5 meters 8M : 8 meters 10M : 10 meters * Must be selected 1 meter above the value to be measured in liquid level measurement</p> <p>Body Material E300: 1.4462 (dublex) E316: 1.4404 (AISI 316L) E100: Titanium</p>					

Product	Housing	Cable Material	O-Ring	Applications
PTL 120	1.4462 (dublex)	PE (polythene)	NBR	Sea water, saline water
	1.4404 (AISI 316L)			Wells, water tanks, lake level, river level, reservoirs, grey waters, waste waters

Atek Elektronik Sensör Teknolojileri Sanayi ve Ticaret A.Ş.



Gebze OSB, 800. Sokak, No:814 Gebze/KOCAELİ/TURKEY

